



Waldhornstrasse 12 D-88662 Überlingen

Fon: +49 (0) 7551.1234 Fon: +49 (0) 7551.4444


Fax: +49 (0) 7551.918888 www.winkler-technik.com





Penta Rail PS1217

The alternative to the U-shaped mounting rail! For all tube diameters from 12 - 17 mm (3/8", 1/2")

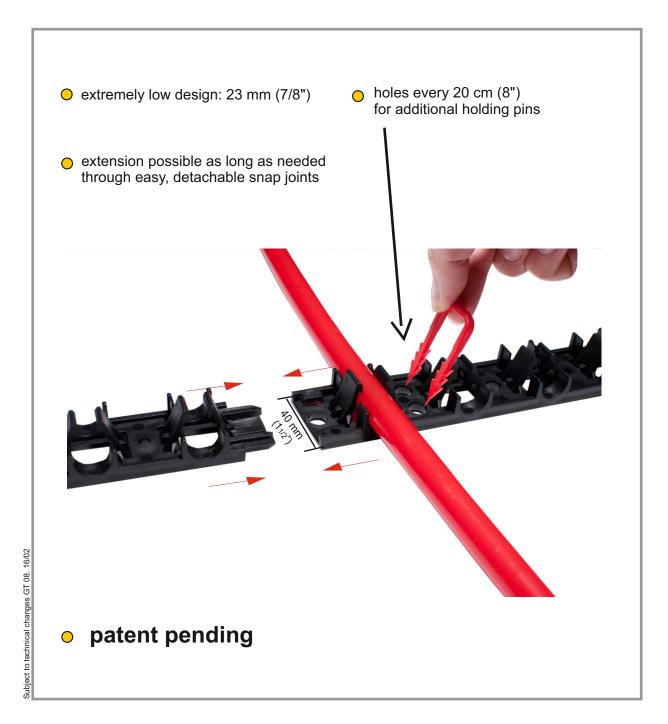

Penta Rail PS1217

- operfectly fitted tubing with a slight rising of the tube
- oprovided with holes for fixing through plastic nails or holding pins
- extension possible as long as needed through detachable snap joints every 20 cm (8")
- the tube intake is suitable for all tube diameters from 12 to 17 mm (3/8", 1/2")
- made of high-quality environmentally friendly special raw material
- available with adhesive tape if requested (item No. PSK1217)

Technical Data					
item No.	for tubing OD	tube distance	width	height	weight/m (3 1/4 ft) approx.
PS1217	12 - 17 mm	50 mm	40 mm	23 mm	0.165 kg
	(3/8", 1/2")	(2")	(1 1/2")	(7/8")	(0.36 lb.)
PSK1217 with self adhesive tape	12 - 17 mm	50 mm	40 mm	23 mm	0.169 kg
	(3/8", 1/2")	(2")	(1 1/2")	(7/8")	(0.37 lb.)

length of penta rail:

bars à 1 m (3 1/4 ft) - to make fitting connection - if requested bars à 2 m (6 1/2 ft) available

quantity of penta rail needed:

approx. 0.5 - 0.8 m (1 3/4 - 2 3/4 ft) rail per m² (10 3/4 ft²) underfloor heating and 1.5 - 2.0 m (5 - 6 1/2 ft) rail per m² (10 3/4 ft²) wall heating

packing/weight:

100 m (328 ft) each carton = approx. 21 kg (46.2 lbs.)

PS1217: 22 cartons each pallet = 2200 m (7,216 ft) = approx. 490 kg (1,078 lbs.)

PSK1217: 24 cartons each pallet = 2,400 m (7,872 ft) = approx. 530 kg (1,166 lbs.)

colour: